G&D DDC-Adapter-K

Deutsch

Der **DDC-Adapter-K** stellt der Grafikkarte eine große Auswahl verschiedener Bildschirmauflösungen zur Verfügung.

Neben der Standardauflösung des Adapters (*1024 × 768 @ 60 Hz*) können Sie im Gerätetreiber der Grafikkarte zwischen den auf der Rückseite aufgelisteten Auflösungen wählen (falls von dieser unterstützt).

Installieren Sie den **DDC-Adapter-K**, wenn die gewünschte und vom Monitor unterstützte Auflösung im Gerätetreiber des Betriebssystems *nicht* ausgewählt werden kann.

Einsatzzweck

Hat die Grafikkarte keinen Zugriff auf die DDC-Informationen des Monitors (beispielweise bei Einsatz bestimmter KVM-Produkte) wird eine vom Monitor unterstützte Auflösung möglichweise nicht im Gerätetreiber angeboten.

Falls die gewünschte Auflösung im Gerätetreiber der Grafikkarte ausgewählt werden kann, ist der Einsatz des DDC-Adapters *nicht* erforderlich!

Installation

- Ziehen Sie den VGA-Stecker aus dem Grafikausgang des Rechners.
- Stecken Sie den **DDC-Adapter-K** auf den Grafikausgang des Rechners.
- Schließen Sie den VGA-Stecker an den **DDC-Adapter-K** an.
- Stellen Sie eine vom Monitor unterstützte Auflösung im Gerätetreiber der Grafikkarte des Betriebssystems ein.

English

The **DDC-Adapter-K** provides the graphics card with a large number of different resolutions.

In addition to the *1024 × 768 @ 60 Hz* standard resolution, you can use the device driver of the graphics card to select a resolution that is listed on the back side (if supported by graphics card).

Please install the **DDC-Adapter-K** if the desired resolution *cannot* be selected in the device driver of the operating system even if it is supported by the monitor!

Intended use

If the graphics card is not able to access the monitor's DDC information (for example if special KVM products are applied), the resolution that is supported by the monitor is probably not provided in the device driver.

If the desired resolution cannot be selected in the device driver of the graphics card, the **DDC-Adapter-K** is *not* required!

Installation

- Unplug the VGA plug from the computer's graphics output.
- Insert the **DDC-Adapter-K** to the computer's graphics output.
- Connect the VGA plug to the **DDC-Adapter-K**.
- Use the device driver of the graphics card of the operating system to adjust a resolution that is supported by the monitor.

Dortmunder Str. 4a ▪ 57234 Wilnsdorf ▪ www.GDsys.de

Guntermann & Drunck GmbH

seit 1985

Unterstützte Auflösungen ▪ Supported resolutions

Auflösung Resolution	**Seitenverh.** Aspect ratio	**Hz**	**Standard**
640 × 480	4:3	60	DMT
640 × 480	4:3	72	DMT
640 × 480	4:3	75	DMT
720 × 400	Text	70	ind.
800 × 600	4:3	56	DMT
800 × 600	4:3	60	DMT
800 × 600	4:3	72	DMT
800 × 600	4:3	75	DMT
1024 × 768	4:3	60	DMT
1024 × 768	4:3	70	DMT
1024 × 768	4:3	75	DMT
1152 × 864	4:3	60	GTF
1152 × 864	4:3	75	DMT
1280 × 720	16:9	60	GTF
1280 × 768	15:9	60	GTF
1280 × 960	4:3	60	DMT
1280 × 1024	5:4	60	DMT
1280 × 1024	5:4	75	DMT
1360 × 765	16:9	60	GTF
1360 × 768	16:9	60	CVT
1400 × 1050	4:3	60	GTF
1440 × 900	16:10	60	GTF
1600 × 900	16:9	60	GTF
1600 × 1200	4:3	60	DMT
1680 × 1050	16:10	60	GTF
1920 × 1200	16:10	60	CVT-RB

Auflösung Resolution	**Seitenverh.** Aspect ratio	**Hz**	**Standard**
480p	4:3	60	CEA
480p	16:9	60	CEA
576p	4:3	50	CEA
576p	16:9	50	CEA
720p	16:9	50	CEA
720p	16:9	60	CEA
1080p	16:9	24	CEA
1080p	16:9	25	CEA
1080p	16:9	30	CEA
1080p	16:9	50	CEA
1080p	16:9	60	CEA

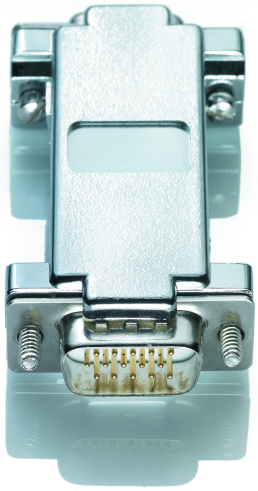

A9100154